












	Model	TA31112	
Interface :			
			



	Overall Dimension (Width-Depth-Height) *open	mm	1.968 x 770 x 1.615(2088*)
	Packaging Dimension (WxDxH)	mm	2.100x920x1800
	Gross weight	Kg	300
	Net weight	Kg	260
	Volume	mc	3,8
	Rack size	mm	500x500
	Useable wash chamber height	mm	450
	Tank wash construction		deep drawn
	Tank pre-wash construction		deep drawn
	General construction		double skin
	Door Construction		double skin and insulated
	Wash Tank volume	liter	70
	Wash Tank heating element	W	10500
	Wash Tank surface strainers		stainless steel
	Wash drawer-like strainers		stainless steel
	Pre-Wash Tank volume	liter	70
	Pre-Wash Tank heating element	W	-
	Pre-Wash Tank surface strainers		stainless steel
	Pre-Wash drawer-like strainers		stainless steel
	Wash pump type		double flow
	Wash pump power	W	1500
	Wash pump delivery	Lt/min	720
	Wash temperature	°C	60 (63)
	Pre-Wash pump type		double flow
	Pre-Wash pump power	W	1500
	Pre-Wash temperature	°C	45
	Boiler volume	liter	17
	Boiler heating element (with 50°C inlet water) standard	W	15500
	Boiler heating element (with 10°C inlet water)	W	27000
	Boiler heating element (with 10°C inlet water +Recovery )	W	20000
	Back-flow system		break tank
	Rinse type		single rinse
	Pre-Rinse		-
	Rinse temperature	°C	82 (65)
	Rinse water consumption	Liter /hour	240min 320max
	Inlet water temperature	°C	Cold:10-40°C Hot:45-60°C

	<i>Optimal external water pressure</i>	<i>bar</i>	<i>from 2 to 4</i>
	<i>Drain system</i>		<i>overflow</i>
	<i>Drain size</i>	<i>G</i>	<i>1' ½"</i>
	<i>Productivity – max speed</i>	<i>Racks per hour</i>	<i>270</i>
	<i>Productivity – general purpose</i>	<i>r/h</i>	<i>200</i>
	<i>Productivity – with 2' contact time</i>	<i>r/h</i>	<i>110</i>
	<i>Productivity – glasses</i>	<i>r/h</i>	<i>135</i>
	<i>Noise level</i>	<i>db</i>	<i>&lt; 70</i>
	<i>Conveyor power</i>	<i>W</i>	<i>200</i>
	<i>Electric Connection</i>	<i>V - ph - Hz</i>	<i>400V 3+N 50Hz</i>
	<i>Max Electric Power with 50°C standard</i>	<i>W</i>	<i>29700</i>
	<i>Max Electric Power with 10°C</i>	<i>W</i>	<i>41200</i>
	<i>Max Electric Power with 10°C +recovery</i>	<i>W</i>	<i>34400</i>
	<i>Plates racks</i>	<i>Nr1</i>	<i>780072</i>
	<i>Flat Rack</i>	<i>Nr1</i>	<i>780135</i>
	<i>Cutterly Rack</i>	<i>Nr1</i>	<i>780139</i>
	<i>Electric cable</i>		<i>not included</i>
	<i>Drain hose</i>		<i>YES</i>
	<i>Fill hose</i>		<i>YES</i>

<i>Rinse aid and detergent dispenser</i>	<i>Optional</i>
<i>Increase power for cold feed</i>	<i>Optional</i>
<i>Drying tunnel</i>	<i>Optional</i>
<i>Drying tunnel on 90° curve</i>	<i>Optional</i>
<i>Heat recovery system</i>	<i>Optional</i>
<i>Chemical product's level probe</i>	<i>Optional</i>
<i>Emergency switch</i>	<i>Optional</i>
<i>End limit switch</i>	<i>Optional</i>
<i>USB and Wi-Fi plug in board</i>	<i>Optional</i>
<i>Corner prewash</i>	<i>Optional</i>

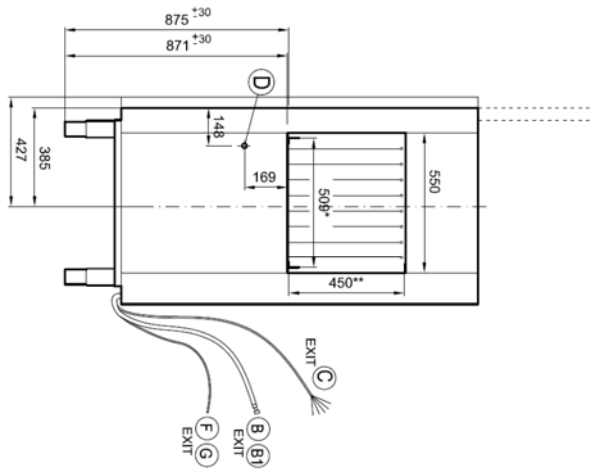


\* USEFUL WIDTH FOR BASKET  
 \*\* USEFUL HEIGHT FOR BASKET

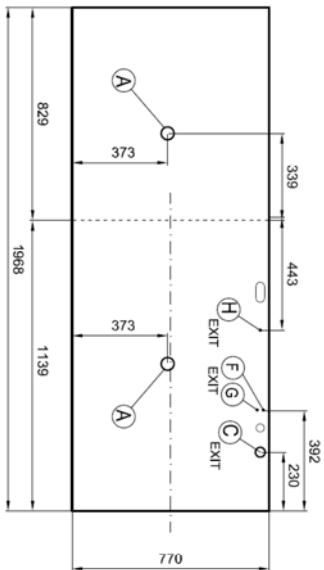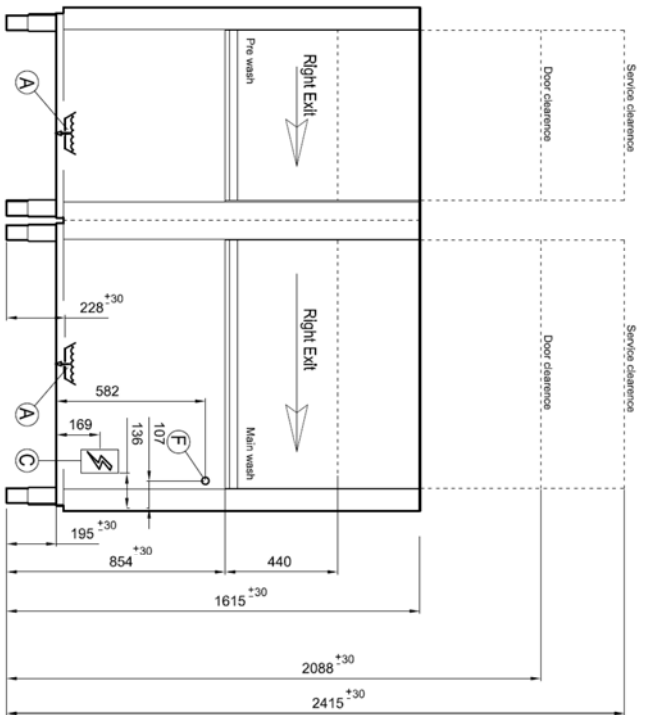



A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse add inlet
C		PG36	H		Ø 6	Equipotential
		Power supply				
			L		Ø 250	Dryer suction

Installation layout		Rack Type		T1102D		Code: 00	
Designed by:	M.P.UCCI	Date:	15.05.2015	Denomination:		Rev.:	



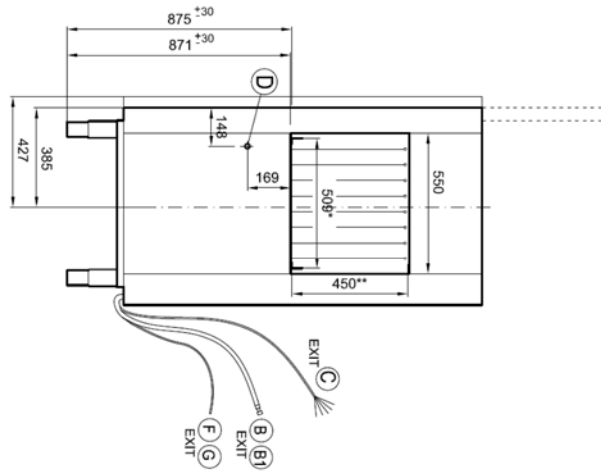

\* USEFUL WIDTH FOR BASKET  
 \*\* USEFUL HEIGHT FOR BASKET

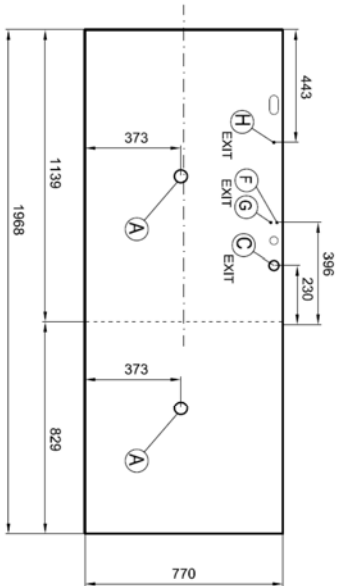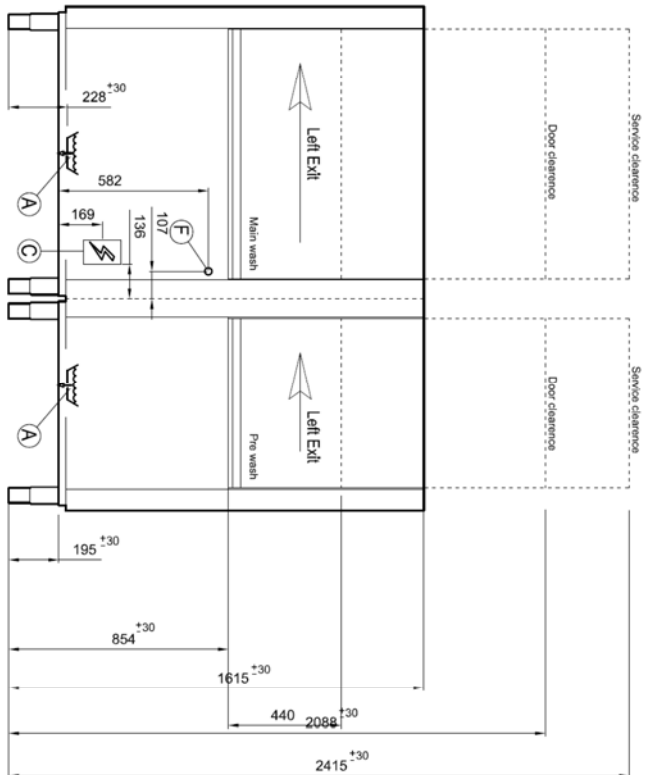

A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid inlet
C		PG36	H		Ø 6	Equipotential

L		Ø 250	Dryer suction
---	--	-------	---------------

Installation layout		Rack Type		T102S	00	
Designed by:	M.P.UCCI	Date:	15.05.2015	Determination:		
Code:		Rev.:				